

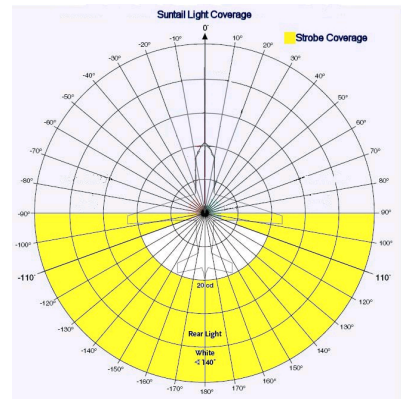
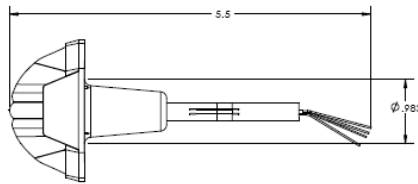





Product Datasheet SunTail Position/Strobe Light 11-1060

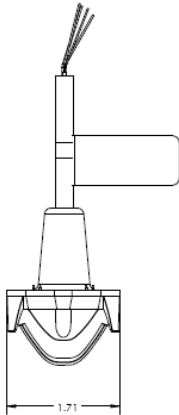

Voltage Range: 9-36VDC
 Position Current 14VDC: 0.4A : 14V, 0.2A : 28V
 Strobe Peak Current: 2.25A : 14V, 1.12A : 28V
 for 0.33 seconds
 Power Consumption: 16 Watts Avg
 Power Supply: Built In
 Synchronization: Built In
 Thermal Protection: Built In
 Position Light: TSO C-30c Type III
 Strobe: TSO C-96a Class II (110L
 to 110R)
 LED Count: 18

Height: 2.15"
 Width: 1.7"
 Depth: 2.61"
 Weight: 3 Oz
 Heat Sink Material: Clear Coated Aluminum
 Lens Material: Polycarbonate
 Rated Life: 50,000 Hours
 Temperature Range: -55C to +70C